


Webhook Options

Overview

iReporter can post messages to Discord (or any webhook-compatible service) automatically when a button is pressed. Up to three webhooks can be configured.

Enable Discord Reporting

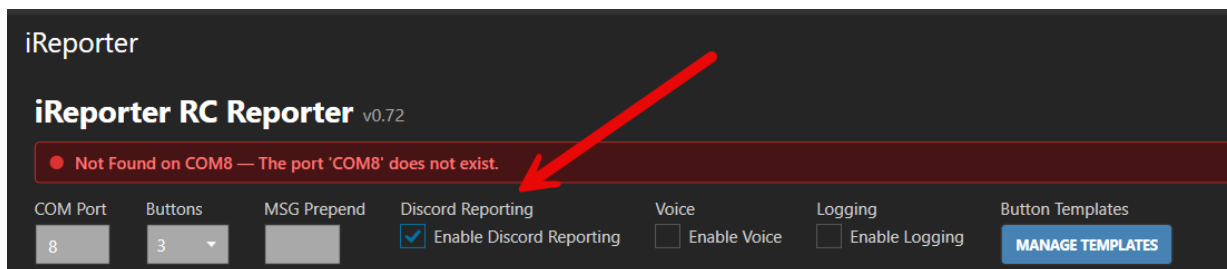

Master switch for webhook posting. When unchecked, no messages are sent to any webhook.

Getting a Discord Webhook URL

Before you can configure a webhook in iReporter, you need to create one in Discord. You need to have **Manage Webhooks** permission in the Discord server to do this.

1. Open Discord and navigate to the **server** where you want iReporter messages to appear.
2. Hover over the **channel** you want to use and click the **gear icon** (Edit Channel) that appears to its right, or right-click the channel and choose **Edit Channel**.
3. In the left sidebar of the channel settings, click **Integrations**.
4. Click **Webhooks**.
5. Click **New Webhook**.
6. Give the webhook a name (e.g. *iReporter*) — this is the display name that will appear as the message sender in Discord. You can also set a custom avatar if you wish.
7. Confirm the correct channel is selected in the **Channel** dropdown.
8. Click **Copy Webhook URL** — the full URL is now on your clipboard.
9. Click **Save Changes**, then close the channel settings.

Paste the copied URL into one of iReporter's Webhook URL fields as described below.

Configuring Webhooks



The screenshot shows a dark-themed interface titled "Webhook Options" in green. It contains three sections, each for a different webhook:

- Webhook 1** with a blue "TEST" button. Below it are two input fields: "Description:" and "URL:", both containing greyed-out placeholder text.
- Webhook 2** with a blue "TEST" button. Below it are two input fields: "Description:" and "URL:", both containing greyed-out placeholder text.
- Webhook 3** with a blue "TEST" button. Below it are two input fields: "Description:" and "URL:", both containing greyed-out placeholder text.

Each webhook has two fields:

- **URL** — the full Discord webhook URL obtained from the steps above.
- **Description** — a label for your own reference (e.g. Race Control, Stewards, Public Feed).

You can configure up to three separate webhooks, allowing different buttons to post to different Discord channels.

Assigning Webhooks to Buttons

Each button has a **Webhook** dropdown that selects which of the three webhooks receives that button's messages. Set to **None** to suppress webhook posting for a specific button.

Revision #3

Created 2026-04-22 23:21:36 UTC by DEV API

Updated 2026-04-23 21:36:31 UTC by DEV API